


Fiberglass Coated Facing Tissue

PRODUCT DESCRIPTION

Fiberglass coated facing tissue is developed by our company, specially for house decoration market. After coated with calcium powder, it is used for gypsum board, thermal insulation board, internal and external wall decoration, etc. The gypsum board and thermal insulation board coated with this tissue has the advantages of fire resistance, water proof, high strength, anti-UV, anti-septic, anti-wrinkle. The gypsum board and insulation board together with building wall can form a new energy-saving and environmental protection wall. They can be used in internal and external walls, elevator shaft, fire passages and other public places and residential places.

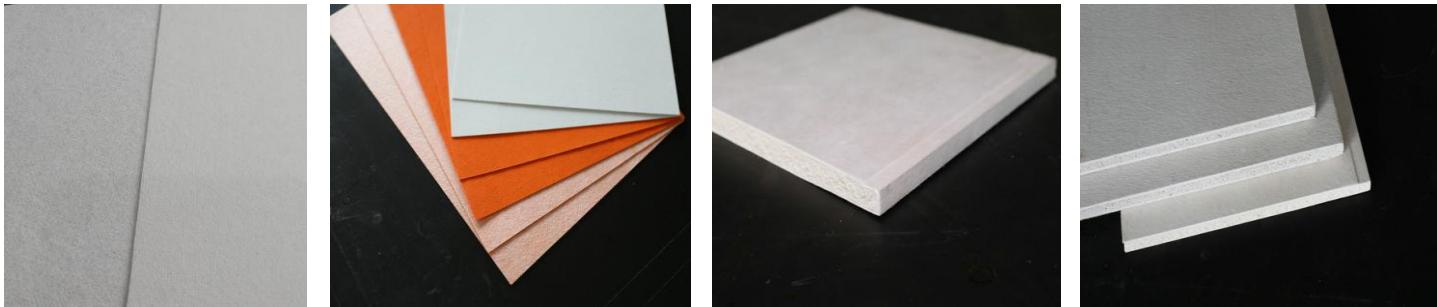

CHARACTERISTICS

- ◆ Fiber Uniformly Dispersed, Smooth Surface
- ◆ High Strength and Bending Resistance after
- ◆ Combined with Gypsum Board
- ◆ Fire Resistance, Water Proof, Anti-UV
- ◆ Antiseptic, Anti-Wrinkle

TECHNICAL DATA

Product Code	Unit Weight	MD Tensile Strength	CD Tensile Strength	Thickness	Moisture Content
	g/m ²	N/50mm	N/50mm	mm	%
F-TMC200	200	≥ 350	≥250	0.70±0.10	≤ 1.0
F-TMC330	330	≥ 400	≥300	0.70±0.10	≤ 1.0
F-TMC350	350	≥ 410	≥310	0.70±0.10	≤ 1.0
F-TMC390	390	≥ 450	≥330	0.80±0.10	≤ 1.0
F-TMC430	430	≥ 500	≥350	0.80±0.10	≤ 1.0
Testing basis	ISO3374	ISO3342	ISO4603 @0.5KPa	ISO 3344	
Paper core diameter: 152/305mm					

Remark: 1. Other specification can be customized according to customer's demand.

2. The technical data above is for reference only

PACKING

1. Roll packaging: PE plastic film
2. Pallet packaging: Pallets should NOT be stacked in more than 2 layers.

STORAGE

This product should be stored in a dry, ventilated and rainproof place, with temperatures from 5°C to 35°C and humidity between 35% and 65%. It is recommended to be kept in intact package when not used to avoid damp.

Version #: No.201911

Address: No.20 Jiangjun Ave., Nanjing, P.R. China

Tel.: 0086 25 52270147 / 58321911

URL: www.fiberglassnonwoven.com

Fax: 0086 25 58321442

E-mail: sales@njefg.com

WhatsApp: 0086 18851651909